

Thank you for choosing Mr Blinds aluminium venetian blinds to be a part of your home.

These instructions will show you how to install your aluminium venetian blind.

Before you begin your installation:

- Read these instructions fully.
- Make sure that you have all tools and hardware needed for installation.
- Ensure you have matched each blind with the correct window.
- Leave the blind pulled-up completely for ease of installation.

Tools & equipment you may need are:

- Phillips head screwdriver
- Screws (provided)
- Pencil
- Ladder

Fitting the Brackets – Inside Fit Only

- Mark the position of the first two brackets on the underside of the top of the window reveal at 180mm from each end.
- Mark the position for the rest of the brackets provided, evenly across the rest of the window reveal. Hold the blind in position checking that the marked bracket positions are between the ladder strings so that the brackets will not interfere with the workings of the blind.
- Screw the brackets in place by placing a single screw through each bracket into the window reveal at the pencil markings (see Figure 1).
- Ensure that all brackets are lined up straight along window reveal.

This side to face
towards you



Fix to bracket
underside of
window reveal

Figure 1: Inside Fit Bracket

Fitting the Brackets – Outside Fit Only

- Mark the position of the first two brackets on the outside face of the window frame at 180mm from each end of where the blind will sit when fitted.
- Mark the position for the rest of the brackets provided, evenly across the rest of the outside of the window frame. Hold the blind in position checking that the marked bracket positions are between the ladder strings so that the brackets will not interfere with the workings of the blind.
- Screw the brackets in place by placing a single screw through each bracket into the outside face of the window frame making sure that the brackets are all set at the same level (see Figure 2).



Figure 2: Outside Fit Bracket

Fitting Your Blind

- Hold the blind from underneath the bottom rail, tilt the top of the head rail of the blind away from you so that the blind is held at an angle then hook the front lip of the head rail over all the brackets.
- Clip the blind onto the brackets by pushing the head rail towards the window whilst at the same time rotating the rear of the head rail upwards until it locks into place on the brackets - a second person may be needed to help with larger blinds (see Figure 3).
- Check that the blind is attached to all the brackets.

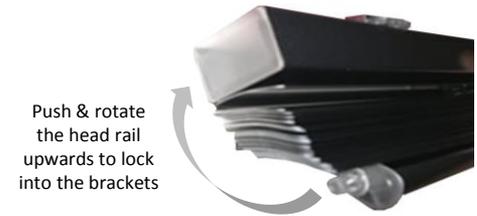


Figure 3: Tilting Blind for Fitting

Check the Blind Operation

- Now that the blind is installed lower the blind and check that it tilts smoothly

Removing Your Blind

To remove the blind, pull the blind up fully then working from the middle of the blind carry out the following steps:

- At each bracket push the head rail towards the window.
- Whilst holding the head rail in that position tilt the back of the head rail down so that the lower part of the blind tilts towards you (rotate the blind in the opposite direction to Figure 3).
- As each bracket unclips move to the next bracket leaving the two outer brackets until the end
- Once all brackets have been unclipped lift the front of the head rail off the brackets.